

# PRODUCT DATA SHEET

TOUCHÉ CONTROLS



## 2-WIRE / 3-WIRE MAGNETIC LOAD DIMMING MODULE

DIM1M-2W/3W-120



TOUCHÉ WEBSITE



INSIGHT APP

### DESCRIPTION

The DIM1M-2W/3W-120 is one of (4) compatible dimmer/relay modules available to use with the RD-32-S2. Capable of forward phase TRIAC dimming and interchangeable in any combination with up to 32 total modules per panel, the DIM1M-2W/3W-120 is one of many options for flexible and cost-effective control of any area utilizing a panel solution.

Individual modules can be assigned to any Room Manager on the éNet network.

### FEATURES

Each module is easily adjusted via the corresponding RD-32, which includes an intuitive 4.3" color touchscreen interface for:

- Local control (on/off/raise/lower) of each installed module.
- Local forced override control of each installed module.
- Channel status including channel level, channel health, source status, and module type.
- Optional password protection access to the local display functions.

The Touché RD-32 interface displays each channel and zone label in the order that it is equipped to the panel. These labels can be configured in the free Touché Insight app from any iOS or Android smartphone/tablet.

| PROJECT NAME/ID | NOTES |
|-----------------|-------|
|                 |       |

Touché Controls (a product of ESI Ventures)

📍 2085 Humphrey St, Fort Wayne, IN 46803

☎ 888-841-4356

🌐 touchecontrols.com

🕒 08-24


## ORDER INFORMATION

| DEVICE TYPE  | CONFIGURATION                                 |
|--|---|
| <b>DIM1M</b> = MAGNETIC LOAD SINGLE CHANNEL DIMMER | <b>2W/3W</b> = LINE VOLTAGE OR 3-WIRE DIMMING |

All Touché products are subject to a standard, 5-year warranty. For exact terms, refer to Touché Warranty Statement.

## MODULE VIEW

NOT TO SCALE

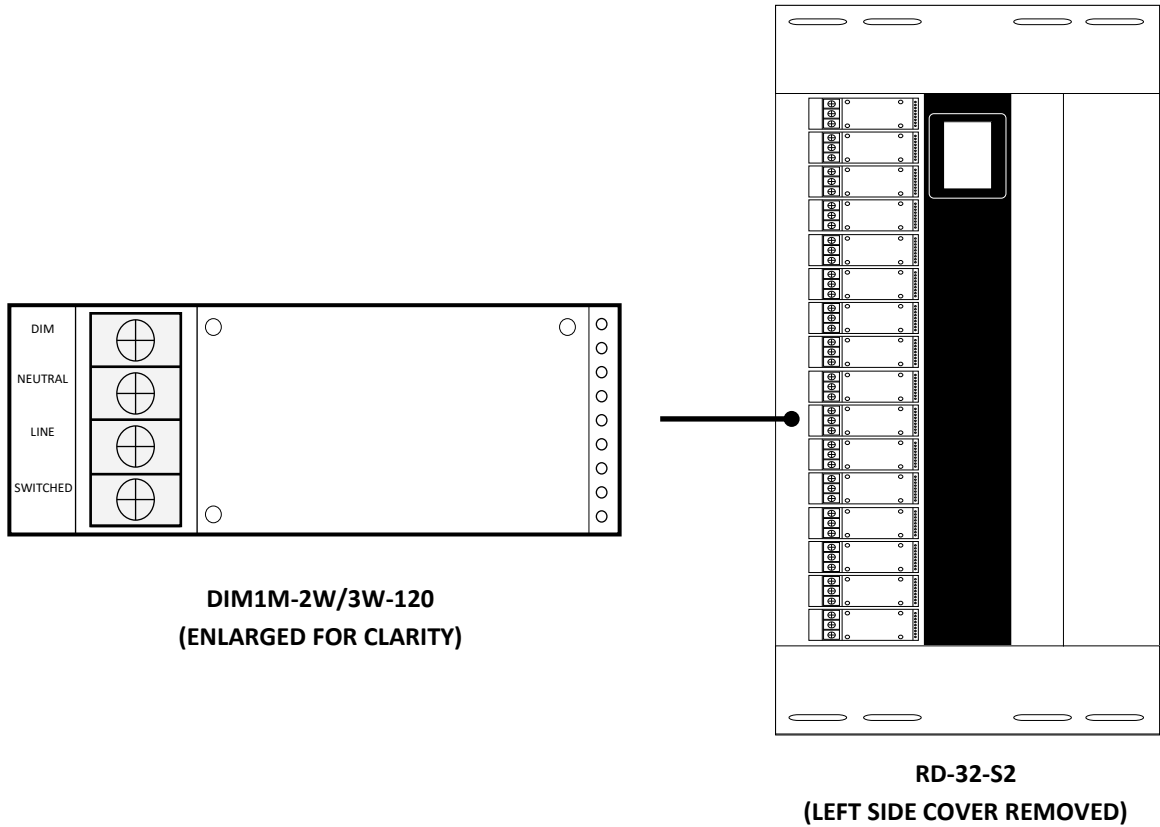

## SPECIFICATIONS

| TYPE                          | DESCRIPTION   |
|-------------------------------|---|
| <b>INPUT RATINGS</b>          | 120 VAC   |
| <b>MAX LINE AMPERAGE</b>      | 6.25A (750W @ 120 VAC)  |
| <b>LISTINGS</b>               | UL916, cUL916   |
| <b>TERMINAL RATING</b>        | #10 AWG   |
| <b>DIMMING</b>                | 2-WIRE MAGNETIC LOAD LINE VOLTAGE DIMMING (INCANDESCENT, MLV) |
| <b>SPECIAL CONSIDERATIONS</b> | NEUTRAL REQUIRED  |

Touché Controls (a product of ESI Ventures)

📍 2085 Humphrey St, Fort Wayne, IN 46803

📞 888-841-4356


🌐 [touchecontrols.com](http://touchecontrols.com)

🕒 08-24


# WIRING

NOT TO SCALE


## WIRING – 2-WIRE — INSTALLED ON LEFT SIDE OF RD-32-S2

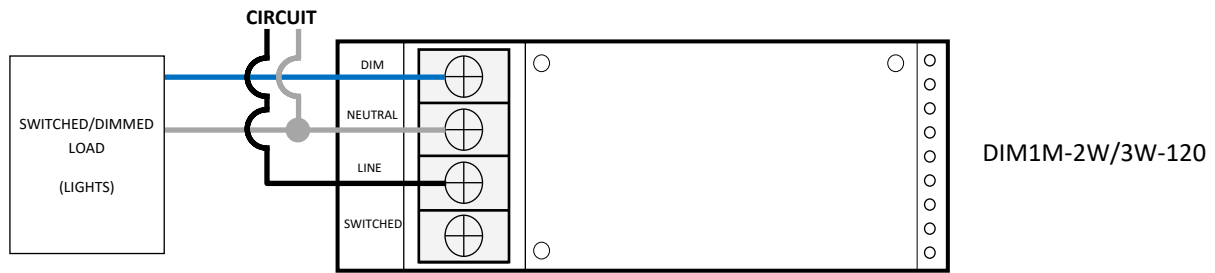

## WIRING – 2-WIRE — INSTALLED ON RIGHT SIDE OF RD-32-S2

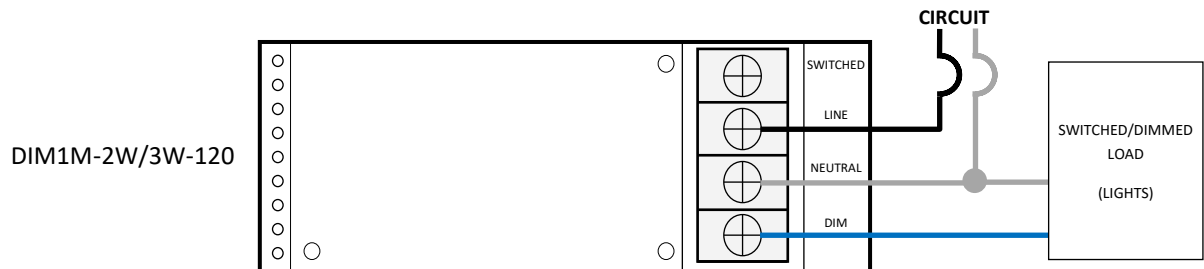

## WIRING – 3-WIRE — INSTALLED ON LEFT SIDE OF RD-32-S2

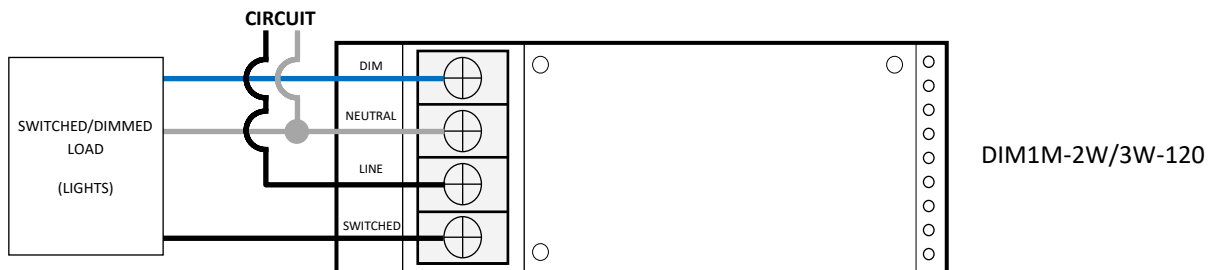

## WIRING – 3-WIRE — INSTALLED ON RIGHT SIDE OF RD-32-S2

