PRODUCT DATA SHEET

TOUCHÉ CONTROLS



WALL STATION—COLOR MINI

WS-C-MINI









DESCRIPTION

The WS-C-MINI is a configurable wall station with a color, capacitive touchscreen display. This wall station utilizes a high resolution backlit display for easy-to-read button labels and zone information.

This device supports both scene and individual zone control with a modern form factor.

Display

- 2.4 TFT display, 340x320, premium brightness, 16.7M colors.
- Capacitive multi-touch interface with multi-page capability.
- Dimmable backlight, with sleep-mode capability.

Control & Communication

Control power and communication is achieved with low voltage CAT5 daisy-chained cable. No additional cabling or sources of power are required.

Switches fit into standard single-gang electrical junction boxes with a standard Decora wallplate (junction box and wallplate not included)

FEATURES

Advanced Scene & Zone Control

- Scene configuration options include 2-button, 3-button, 4-button, and 5-buttons. A scene raise/lower option is available when utilizing 2 through 4-button configuration.
- Capable of supporting up to 4 zones of individual zone control, displayed on a secondary page.
- Scene/Zone indication and control can be hidden when not desired.
- Press-and-hold function for simple, current shown preset saving capability.
- Button text is user configurable when utilized with the Room Manager.

WS-C-MINI features optional 4-digit passcode security feature to ensure that the wall station is only accessed by the intended users.

PROJECT NAME/ID	CATALOG ID	PREPARED BY	NOTES	DATE

Touché Controls (a product of ESI Ventures)










ORDER INFORMATION CONFIGURATION DEVICE TYPE DISPLAY TYPE WS = WALL STATION C = COLOR **MINI** = MINIATURE

All Touché products are subject to a standard, 5-year warranty. For exact terms, refer to Touché Warranty Statement.

EXAMPLE CONNECTIVITY

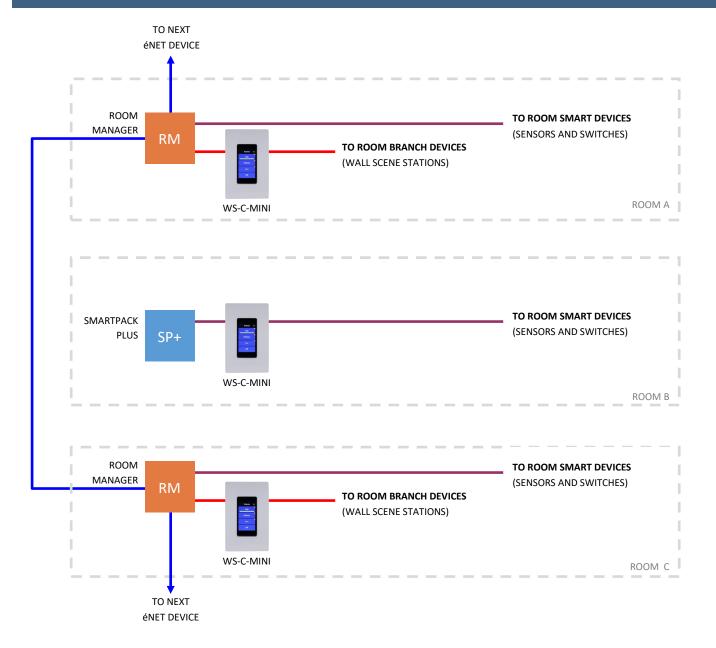

Touché Controls (a product of ESI Ventures)







SPECIFICATIONS TYPE DESCRIPTION 24VDC—SOURCED FROM BRANCHNET OR SMARTNET **POWER SUPPLY VOLTAGE** (NO EXTERNAL POWER SUPPLY REQUIRED) **CONNECTIVITY** CAT5 (MINIMUM) **LISTINGS** UL916, cUL916 AMBIENT TEMPERATURE 60C (140F) **MAXIMUM HUMIDITY** 10-90% NON-CONDENSING

DIMENSIONS

