




SMART SWITCH—DECORATOR

PART #: SS-DEC

LED INFORMATION




FLASHING
GREEN LED

COMMUNICATION ERROR

ISSUE—POWER AND NO
COMMUNICATION

- VERIFY CABLING TERMINATION
COLOR CODING




SOLID
RED LED

PORT ERROR

ISSUE—PLUGGED INTO BRANCH
PORT

- CONNECT TO SMART PORT



SOLID
BLUE LED

DEFAULT

CLEANING INSTRUCTIONS



SYMBOLS AS SHOWN
ON SUBMITTAL AND
CONSTRUCTION
DOCUMENTS

ALWAYS

- USE ONLY TOUCHSCREEN SAFE CLEANER AND CLEAN MICROFIBER CLOTH
- DAMPEN THE CLEAN MICROFIBER CLOTH AND WIPE SWITCH
- WIPE THE SWITCH DRY WITH A CLEAN MICROFIBER CLOTH



NEVER

- USE GLASS CLEANER
- SPRAY SWITCH DIRECTLY WITH CLEANER
- USE PAPER TOWELS

**FAILURE TO FOLLOW THESE INSTRUCTIONS
WILL DAMAGE THE SWITCH AND VOID THE
WARRANTY**

TIPS / NOTES

- MINIMUM CAT 5 CABLE—ENSURE CABLES ARE PLUGGED INTO SMART PORTS OF ROOM MANAGER, SMARTPACK PLUS, OR SMARTPACK. **DO NOT CONNECT TO BRANCH PORTS.**
- MOUNT TO SINGLE GANG JUNCTION BOX OR 4 SQUARE BOX WITH SINGLE GANG MUD RING.





SMART SWITCH—DECORATOR

PART #: SS-DEC



SYMBOLS AS SHOWN
ON SUBMITTAL AND
CONSTRUCTION
DOCUMENTS

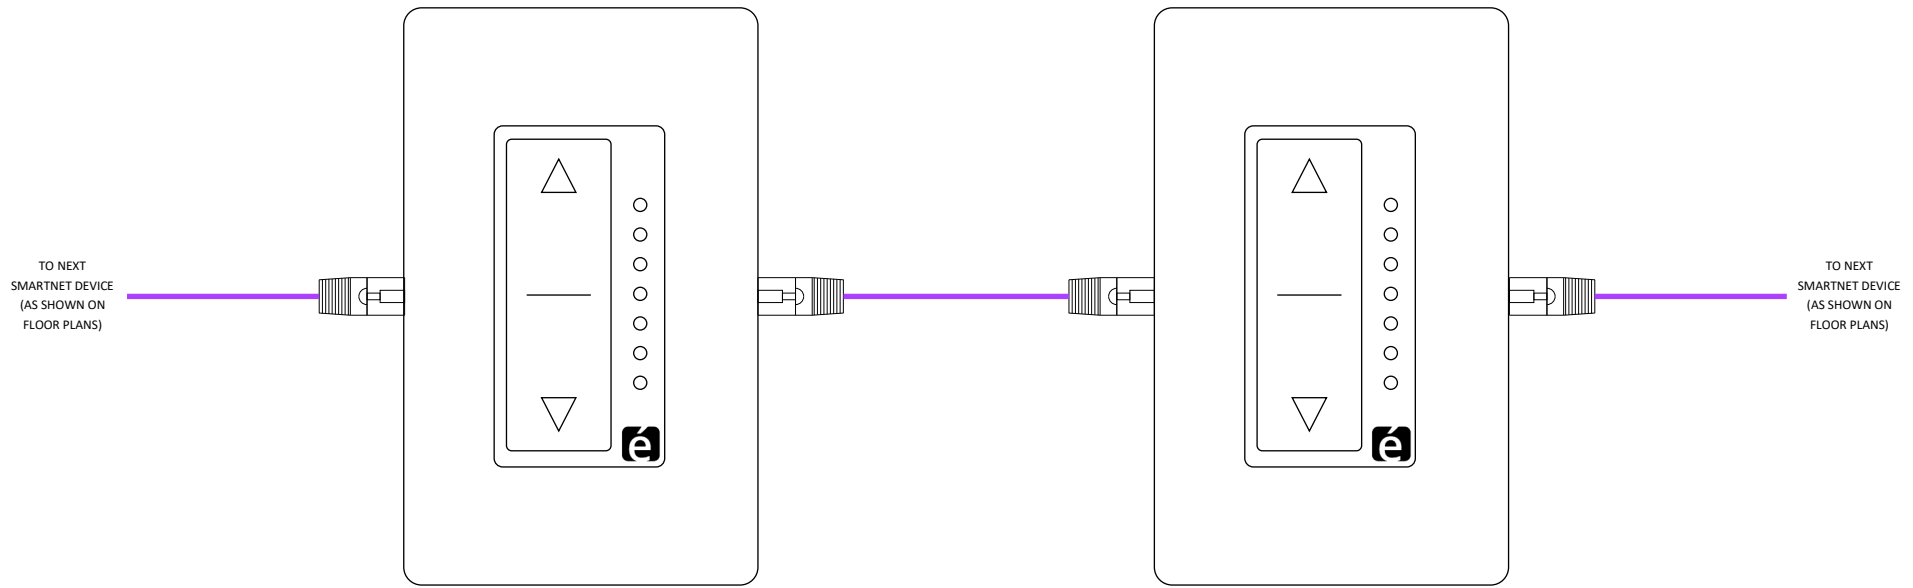

CABLE TYPES			
LINE ID	DESCRIPTION	TYPE	NOTES
	SMART	CAT 5 (MIN)	TOTAL SMARTNET LENGTH NOT TO EXCEED 400'